


Product Spec Sheet
Double Auto Reverse Cassette Deck
202MKVI

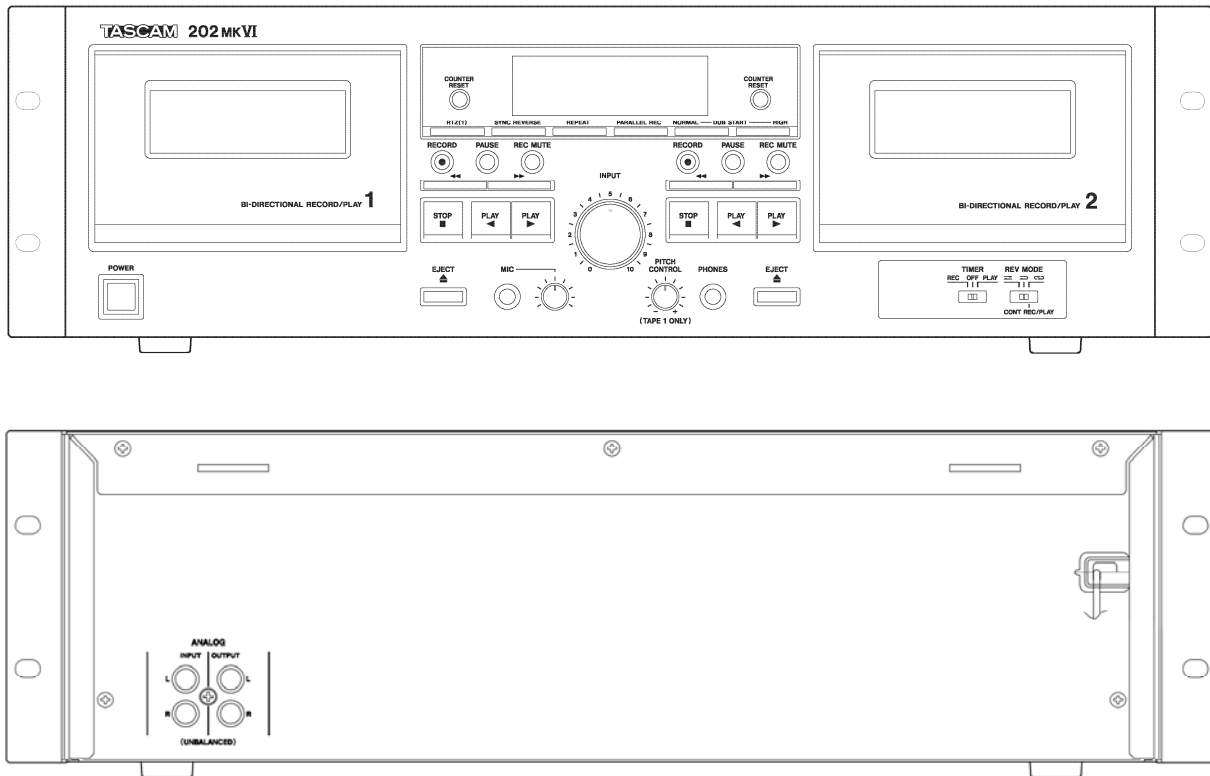


■ Specifications

Track System	4-track, 2-channel stereo
Heads Construction	Record/playback head × 1 (each deck) Erase head × 1 (each deck)
Tape Speed	4.8 cm/sec 9.5 cm/sec (high-speed dubbing mode)
Pitch Control	12%
Fast Winding Time	approximately 160 sec (C-60 tape)
Motor	DC servo motor (capstan)
Wow and Flutter	0.25% (WRMS)
Frequency Response (Overall)	
High position tape (Type II)	30 Hz-15 kHz (±4 dB)
Normal tape (Type I)	30 Hz-13 kHz (±4 dB)
Signal to Noise Ratio (Overall)	58 dB (at maximum recording level input, A-Weight)

ANALOG INPUT jacks (RCA)	
Reference input level	0.28 V
Input impedance	50 k Ω
MIC input jack (standard mono jack)	
Reference input level	0.38 mV
Input impedance	47 k Ω
ANALOG OUTPUT jacks (RCA)	
Reference output level	0.46 V
Load impedance	50 k Ω or higher
Headphones Output (stereo 1/4" Phone jack)	2 mW / 32 Ω
Power Requirements	U.S.A./Canada AC 120 V, 60 Hz U.K./Europe AC 230 V, 50 Hz
Power Consumption	22 W
Dimensions (including protruding parts)	483 (W) \times 138.4 (H) \times 285.8 (D) mm (19" \times 5 7/16" \times 11 1/4")
Weight	5.4 kg (11 7/8 lb)

■ Dimensional drawing

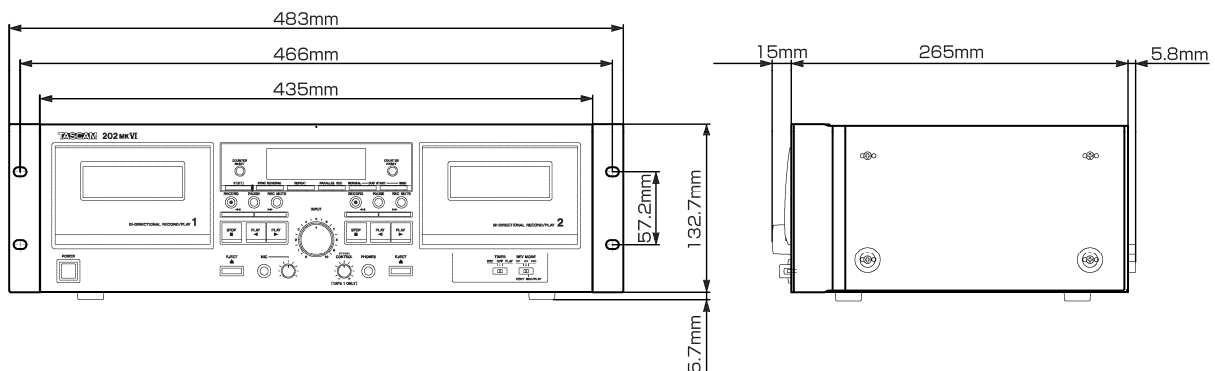

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.
 ※Other company names, product names and logos are the trademarks or registered trademarks of their owners.
 ※Specifications and appearance are subject to change without notice.
 ※All information included in this document is as of Sep, 2014.